

SUPERWINCH

SX SERIES WINCH



INTRODUCING THE SX SERIES BY SUPERWINCH

Hit the trail with confidence with the SX Series Winch from Superwinch! The SX Series is a tough, capable winch built on the proven performance of the vaunted Superwinch Tiger Shark Series. We thoroughly modernized the Tiger Shark's solid architecture to provide the Power, Speed, and Innovation demanded by today's discerning enthusiasts. The SX Series is IP68-rated for dustproof and waterproof operation, giving you the confidence to explore in any condition or terrain, while the patented Drum Light and Rechargeable Winch Remote Flashlight make it easy to use the SX Series day or night. The durable metallic graphite powder coat finish provides both great looks and long life, and the innovative Pull-And-Turn engagement handle provides hassle-free operation, no matter the load or conditions. Available in 10,000 and 12,000 lbs versions, when you run the Superwinch SX Series, you run the best!


FEATURES AND BENEFITS:

- **ERGONOMIC PULL-AND-TURN CLUTCH HANDLE**
Allows hassle-free operation free spool
- **PATENTED DRUM LIGHT**
Provides superior visibility in low light conditions
- **MULTI-FUNCTION WIRED REMOTE**
Includes Integrated rechargeable flashlight
- **WIRELESS REMOTE**
[SYNTHETIC ROPE MODELS ONLY]
Ergonomic handle with molle loop clip
- **RELOCATABLE DIE-CAST CONTROL BOX**
Heavy-duty aluminum construction with 18" leads
- **CLOCKABLE 3-STAGE PLANETARY GEARBOX**
Can be oriented in 4 different positions



*Included with synthetic rope models only

DIMENSIONS

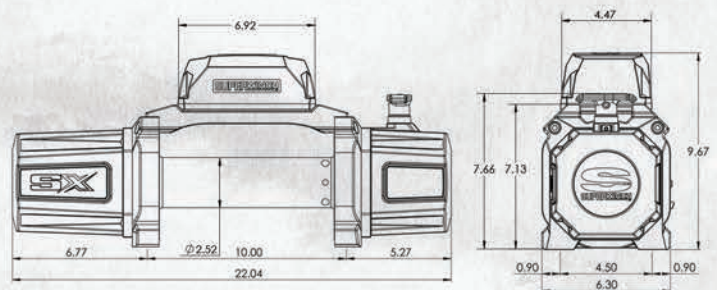

POWER, SPEED, INNOVATION AND PROVEN PERFORMANCE



SX 10SR AND SX 10 SX 12SR AND SX 12

SPECIFICATIONS

WINCH MODEL: SX Series

PART NUMBERS: 1710201 (SX 10SR), 1710200 (SX 10),
1712201 (SX 12SR), 1712200 (SX 12)

RATED LINE PULL: 10,000 lbs./12,000 lbs.

MOTOR: 5.5 HP (10,000 lbs)/ 6.0HP (12,000 lbs)

CONTROL BOX: Relocatable Die-Cast Aluminum Construction

REMOTE CONTROL: 12' Handheld Wired Remote, Optional
Wireless Handheld Remote (included with synthetic rope models).
(Wired Remote Features Flashlight with Built-in Lithium ION
Battery. Recharges While Plugged Into Winch).

GEARBOX: 3-Stage Planetary

GEAR RATIO: 218:1 (10,000 lbs)/ 231:1 (12,000 lbs)

CLUTCH: Ergonomic Pull-and-Turn Clutch Handle

BRAKE: 100% Full-load Holding Automatic Mechanical Brake

SYNTHETIC ROPE: 80' (24.4m) 3/8" Diameter Lightweight
Synthetic with UV Protection

WIRE ROPE: 85' (25.9m) 3/8" Diameter Steel

DRUM DIAMETER: 2.5" (64mm)

FAIRLEAD: Aluminum Hawse (Synthetic), Stainless Steel 4-Way
Roller Fairlead (Wire)

TASK LIGHTING: Patented Drum Light, Rechargeable Flash Light
(Wired Remote Only)

WINCH HOOK: Heavy Duty Pinned/Latched

WARRANTY: Limited Lifetime Mechanical and
7 Year Limited Electrical

FINISH: Durable Metallic Graphite Powder Coating

IP RATING: IP68 Waterproof and Dustproof Winch

MOUNTING BOLT PATTERN: 10" x 4.5"

SX 10/12 PERFORMANCE SPECIFICATIONS

LINE PULL	LINE SPEED		MOTOR	
	Lbs.	Ft./Min.	Amp Draw	
	10K	12K	10K	12K
0	27.3	23.4	85	68
2000	11.9	11.1	160	160
4000	9.7	8.5	211	204
6000	7.5	7.6	262	248
8000	6.3	6.2	312	291
10000	4.5	4.8	363	335
12000	–	3.7	–	379

PULL BY LAYER

10 K Layer/Lbs.	12K Layer/Lbs.
(1) – 10000	(1) – 12000
(2) – 7946	(2) – 9535
(3) – 6592	(3) – 7910
(4) – 5632	(4) – 6759

SHOWN WITH RELOCATED CONTROL BOX



WIRED REMOTE
WITH RECHARGEABLE
LIGHT